
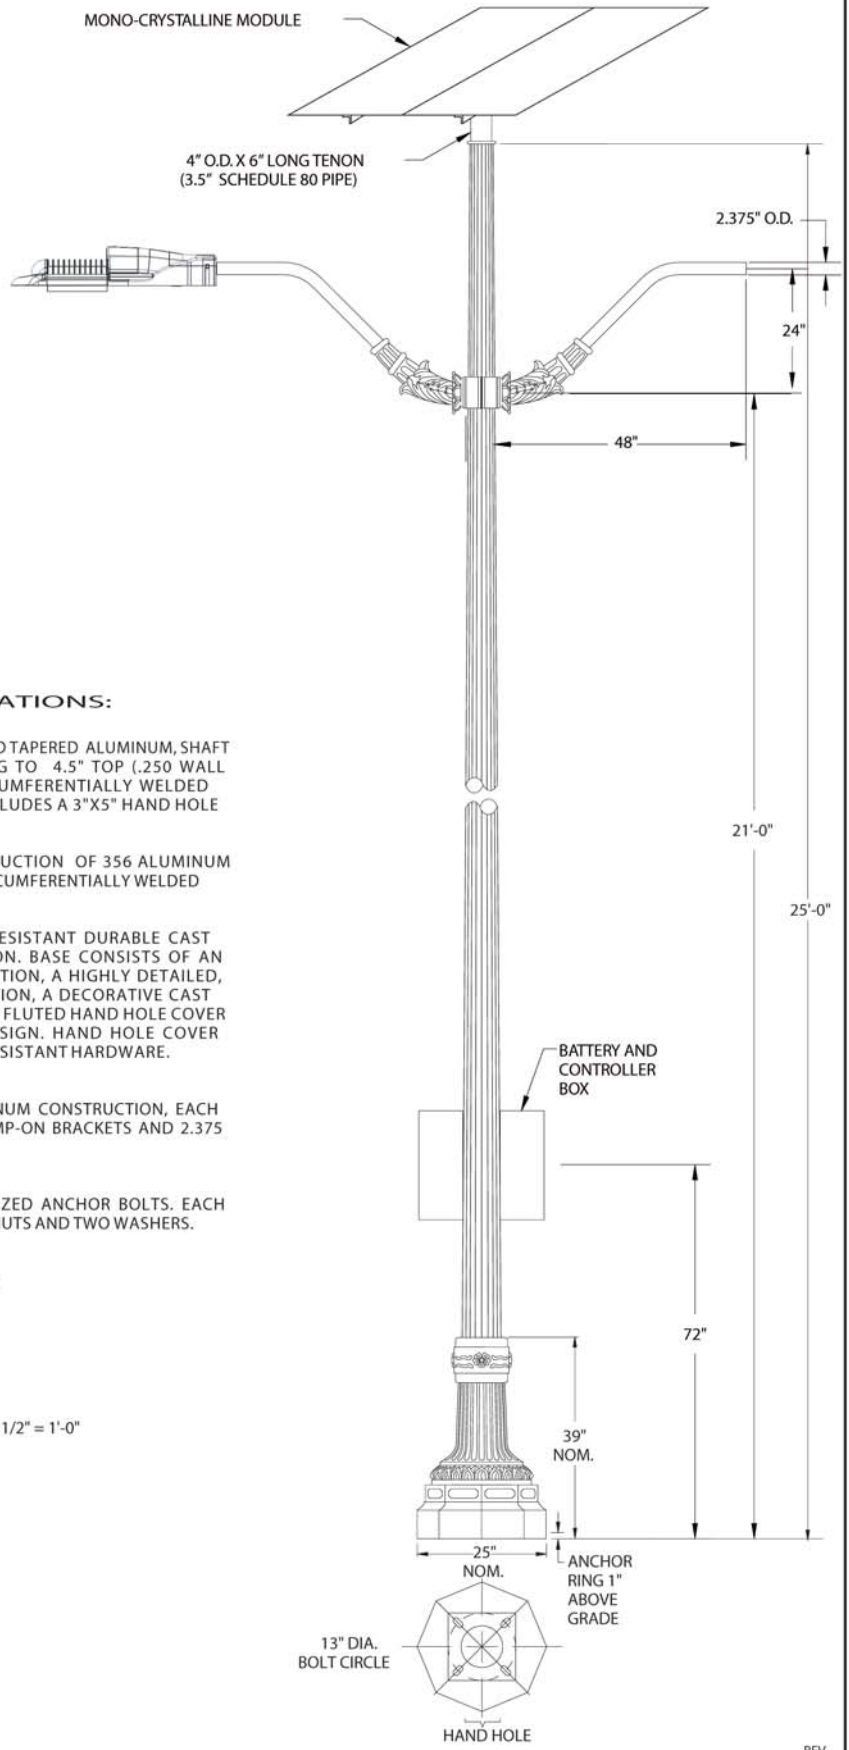


CUSTOMER APPROVAL:
 X _____ DATE: _____
 A signed approval will be required with the released order



SPECIFICATIONS:

- SHAFT:** 16 SHARP FLUTED , ROUND TAPERED ALUMINUM, SHAFT HAS 8.0" BUTT TAPERING TO 4.5" TOP (.250 WALL THICKNESS). SHAFT IS CIRCUMFERENTIALLY WELDED TO BASE PLATE. SHAFT INCLUDES A 3"X5" HAND HOLE FURNISHED WITH COVER.
- BASE PLATE:** CAST ALUMINUM CONSTRUCTION OF 356 ALUMINUM ALLOY, ANCHOR BASE IS CIRCUMFERENTIALLY WELDED TO SHAFT.
- BASE:** TWO PIECE CORROSION RESISTANT DURABLE CAST ALUMINUM CONSTRUCTION. BASE CONSISTS OF AN OCTAGONAL BOTTOM SECTION, A HIGHLY DETAILED, DECORATIVE FLUTED SECTION, A DECORATIVE CAST ALUMINUM COLLAR AND A FLUTED HAND HOLE COVER CONTOURED TO BASE DESIGN. HAND HOLE COVER SUPPLIED WITH TAMPER RESISTANT HARDWARE.
- ARM:** DECORATIVE, CAST ALUMINUM CONSTRUCTION, EACH ARM PROVIDED WITH CLAMP-ON BRACKETS AND 2.375 DIA. EXTRUDED ARM.
- ANCHORAGE:** (4) 1"X36" FULLY GALVANIZED ANCHOR BOLTS. EACH BOLT SUPPLIED WITH TWO NUTS AND TWO WASHERS.
- FINISH:** POLYESTER POWDER COAT (SPECIFY COLOR)

SCALE: 1/2" = 1'-0"



		PART NO.		
		DRN A.O.	CHK'D	MAT'L
		DATE 11-07-12	SCALE 1/2"=1'	SHEET
TOLERANCE UNLESS NOTED		DESCRIPTION		
		CS-6360 rev. 1		
Lancaster, SC USA Ph. +1 803-233-3461 Fax 803-233-2096 www.solarlightingintl.com				

SYM.	REVISION	BY	DATE
------	----------	----	------