



Double Sided

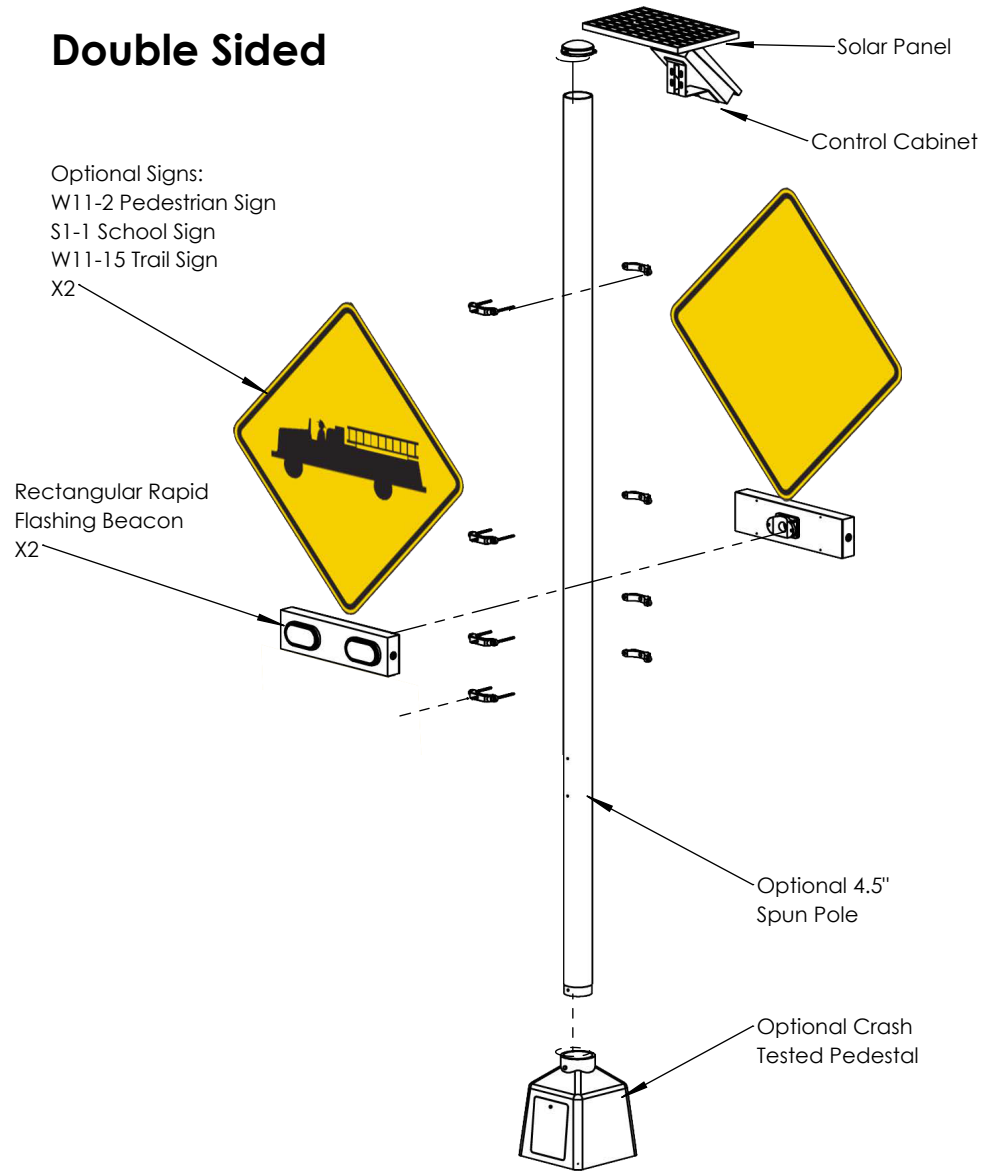

Single Sided

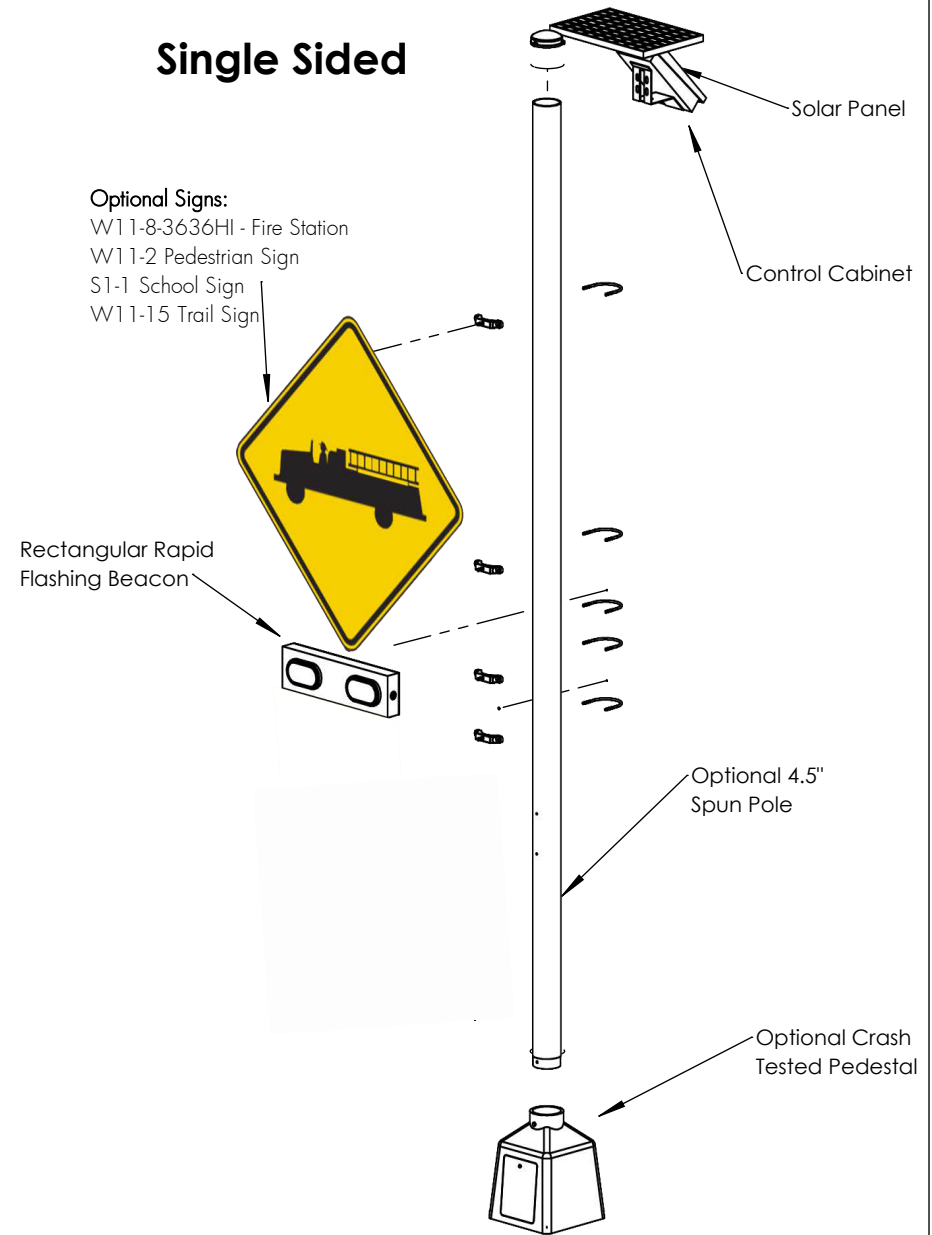

Cabinet and housing prevent unauthorized access
Flashing beacon assembly can be installed on 4.5 inch outer diameter posts
All exposed assembly hardware including nuts, bolts, screws, and locking washers less than 5/8 inch in diameter, is Type 304 or 316 passivated stainless steel and meets the requirements of ASTM F593 and ASTM F594
All assembly hardware greater than or equal to 5/8 inch in diameter is galvanized and meets the requirements of ASTM A307
Equipment operates on solar power or a nominal voltage of 120 volts alternating current (VAC).



	NAME	DATE	Solar Lighting International, Inc.	
DRAWN	Fred Charlotte	6/6/2018	Office: (803)233-3461 www.solarlightingintl.com	
CHECKED	Dan Whigham	6/6/2018	TITLE: Exploded View For ECO-RRFB Pole	
PROPRIETARY AND CONFIDENTIAL The information contained in this drawing is the sole property of Solar Lighting International, Inc.. Any reproduction in part or as a whole without written permission is prohibited.			DWG. NO. ECO-RRFB Pole	
Scale: 1:1		Size: 11 X 17	Sheet: 1 of 1	