



# PORTABLE CHANGEABLE MESSAGE BOARD

## MODEL # SLI-2748-68-PORTABLE


The all new SLI-2748-68-PORTABLE Message Board provides messaging functionality to display predefined and custom messages in multiple lines of 12" high alphanumeric text via an on-board controller. Our all LED display measures 97" x 57" and is mounted on a powder coat hydraulic style trailer.

### FEATURES

- Maintenance Free Batteries
- Long Lasting Battery Life
- Sealed Battery Box
- Single 140 Watt Solar Panel
- Meets MUTCD Standards
- Auto Dimming
- Super Bright LED Technology
- 360° of Rotation
- Durable Powder Coat Paint
- (4) Adjustable Corner Jacks and (1) Tongue Jack
- Sleek Frame Design



Onboard keyboard programming controller is built into the back of the display.

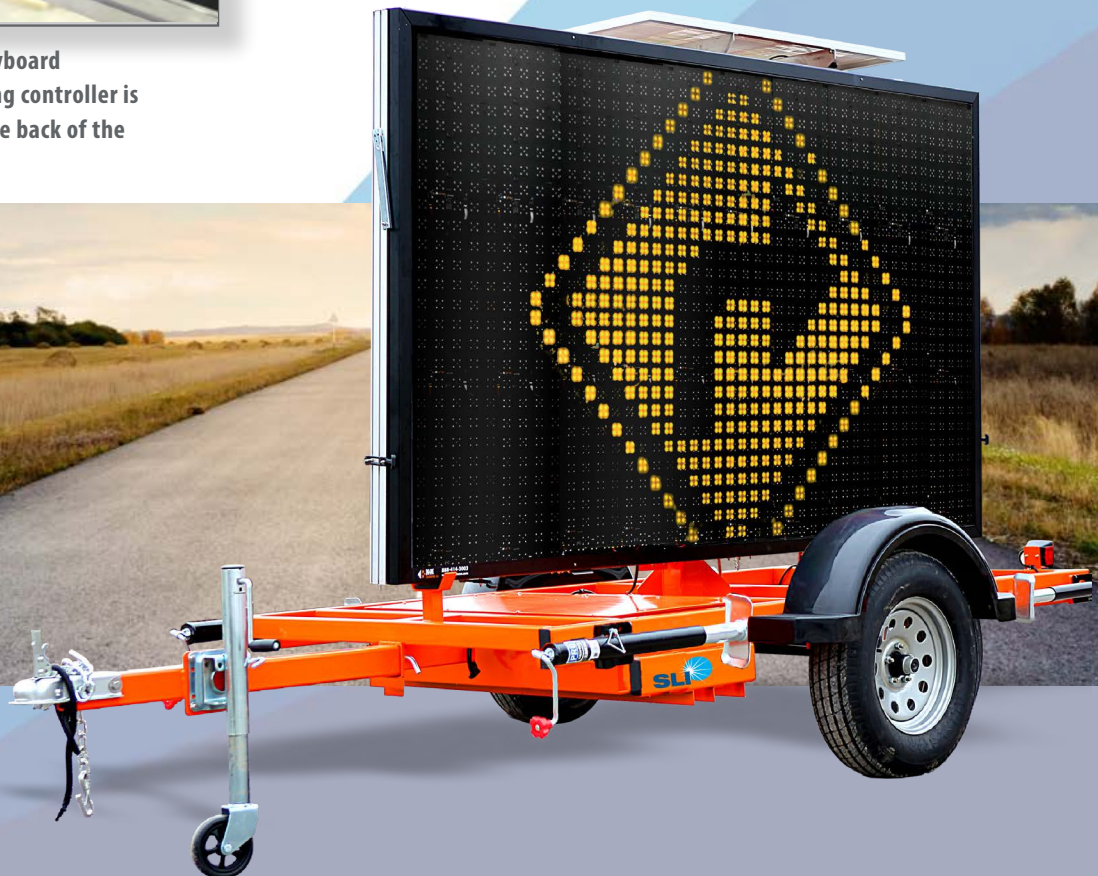

# SLI-2748-68-PORTABLE

## PORTABLE MESSAGE BOARD

### TRAILER MOUNT SERIES

#### TRAILER

**Width:** 68" fender to fender

**Length with tongue:** 148.25"

**Length without tongue:** 98.5"

**Salt Spray:** 1,000 hours

**Paint:** Powder Coat

**Main frame:** 2"x 5"x 1/8"

**Front/Rear Cross members:** 2"x 3"x 1/8"

**Wheels:** 15"

**Axle:** 3500 lbs double leaf spring

**Fenders:** High-density polyethylene

**Jacks:** (4) adjustable corner jacks & tongue jack with wheel

**Tongue and Safety Chains:** 2" ball hitch; 1/4" safety chains with hooks

#### SIGN DISPLAY

**Pixel Matrix:** 27x48 Pixel Arrangement

**LED Module:** Each is 6x9 matrix

**LED's Per Pixel:** 4

**LED Type:** Agilent amber 592NM

**Viewing Angle:** 30 degrees

**Visibility:** Up to 1 mile

**Hours:** 100,000 hour LED

**Lines:** Displays text and graphics

**Characters per line:** 8 characters

**Character Height:** 18"

*\*If one module fails, remainder of board is unaffected*

#### DISPLAY ENCLOSURE

**Construction:** Extruded Aluminum 6063 alloy

**Length:** 97"

**Width:** 57"

**Depth:** 6"

**Paint:** Powder coat

**Salt Spray:** 1000 hours

**UV Resistant:** 500 hours

**Seal:** Weather resistant

**Venting:** Vented top and bottom

**Front face:** 1/8" Lexan UV matte finish

**Raising and lowering of display:** Electro-hydraulic  
**Secondary raise and lowering:** Manual hand pump

#### POWER AND CHARGING

**Batteries:** (4) 12 volt batteries for combined 675 amps

**Battery Charger:** 10 Volt, 1000 watt, 60 amp

**Recharge:** 24 hours

**Onboard diagnostics to monitor:** Solar, battery, and load

**Solar:** (1) 140 watt solar panels

**Regulator:** Low voltage & high voltage disconnects built into CrossTalk

#### CONTROLLER

**Preprogrammed Messages:** 215

**User programmable:** 100

**Message Timing:** Slow, medium, fast

**Dimming:** Auto or Manual

**Protection:** Password

**Quick Message Selection:** Thumbwheel to quickly select between 16 user programmable messages.

**Controller Display:** LCD

**Data Entry:** Mini Keyboard

**Memory:** Non volatile

*\*Pre-wired to accommodate radar, cell modem, and PC*

*\*\*"Auto Resume" after power failure*

#### OPTIONS

- Locking lug nuts
- Radar
- Pintle ring or bulldog hitch
- Electric or hydraulic brakes
- Custom Paint
- Outrigger Stability Supports
- Other Options available



#### Solar Lighting International's Quick Message Selection

Thumb-wheel switches between the first 16 user defined messages. Roll the thumb-wheel to the desired message number to display a message.

